



POWER TO PERFORM

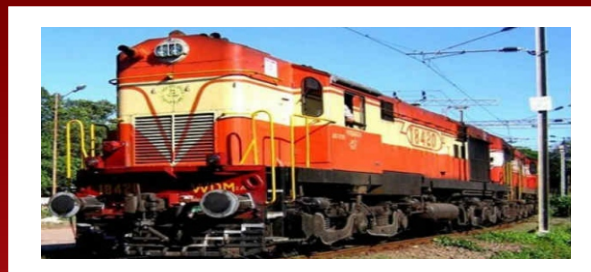

AUTOMOTIVE PRODUCTS

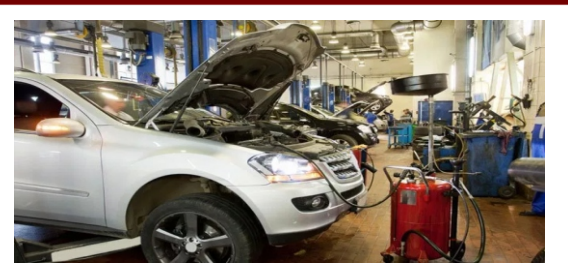

ORIGINAL EQUIPMENT & MAINTENANCE PRODUCTS



“BULLDOG”

GASKET MAKERS



RED - High Temp. - 343°C - Neutral Cure RTV Silicone

An ideal Gasket Maker for heavy duty applications, it resists high temperature, high pressure and vibrations. An ideal Gasket Maker for trucks, trailers, tractors, heavy machinery, marine applications and aviation; for reliability and high temperature performance.

3mm Bead @ 25°C and 50% RH

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
0.94 -1.00 g/ml	5 - 7 min	22-24 Hrs	7-10	> 300%	Resistant

Packing : 13g / 25g / 33g / 85g Tubes, 280 ml Cartridges



Grey - High Temp. - 343°C - Neutral Cure RTV Silicone

Gasket Maker - Grey, is a Neutral Cure - High Temp. resistant product, with applications in all vehicles. It forms a reliable and durable seal for all engine repairs, also for oil and water pumps, oil pan etc. It can withstand all automotive fluids and is not affected by oils.

3mm Bead @ 25°C and 50% RH

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
0.94 -1.00 g/ml	5-7 min	22-24 Hrs	10-12	> 300%	Resistant

Packing : 25g / 85g Tubes



Black - High Temp. - 343°C - Neutral Cure RTV Silicone

An ideal gasketing material for all automotive engines, pumps, diesel gensets, and other engine parts, such as oil pan, fuel pump, water pump, manifolds etc. It forms a very reliable gasket which withstands high temp. and also withstands high pressure and vibrations.

3mm Bead @ 25°C and 50% RH

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
0.94 -1.00 g/ml	5-7 min	22-24 Hrs	7-10	> 300%	Resistant

Packing : 25g / 85g Tubes



Blue - High Temp. & High Performance - Neutral Cure RTV Silicone

A High Performance, Gasket Maker - Blue is particularly suitable for heavy engines of Trucks, Trailers, Buses and also for railway and marine applications. It withstands high temperature and pressure and is resistant to oils and most automotive fluids. The cured material forms a hard seal, suitable for heavy engines.

3mm Bead @ 25°C and 50% RH

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
1.20 -1.30 g/ml	5-7 min	22-24 Hrs	20-22	250-300%	Good

Packing : 25g / 85g Tubes



Clear - Mod. to High Temp. - 250°C - Neutral Cure RTV Silicone

Specially prepared gasketing material for all automotive engines, pumps, diesel gensets, and other engine parts, such as oil pan, fuel pump, water pump, manifolds etc. It forms a hard gasket which withstands temp. upto 250°C and also withstand high pressure and vibrations. It is also useful for side windows and headlamp sealing. An ideal all purpose gasketing material.

3mm Bead @ 25°C and 50% RH

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
0.94 -1.00 g/ml	5-7 min	22-24 Hrs	15-17	250-300%	Resistant

Packing : 15g / 25g / 85g Tubes



“BULLDOG”

GASKET SHELLAC COMPOUND



A specially formulated heavy bodied compound of natural resins and solvent for sticking of ready-made /precut gaskets. It resists the action of petrol, oil, water kerosene, coolant etc, and it is an ideal gasket adhesive for heavy machines such as trucks, trailers, tractors, and all other automobiles, railway applications, compressors, machinery etc.

3mm film @ 25°C

Appearance	Viscosity (B8)	Density	Skin Dry Time	Full Dry Time	Oil Resistance
Dark Brown Colour	20 - 28 sec	1.03 - 1.07 g/ml	10 -15 Min	110-130 Min	Good

Packing : 30ml / 50ml / 100ml / 500ml / 1000ml Plastic Bottles

VALVE GRINDING COMPOUND



A homogeneous paste of high quality hard abrasives mixed with grease, the Valve Grinding Compound is specially formulated for grinding of valves of automobile and other engines. It is available in 2 grades, Rough and Fine for initial and final grinding. It is also useful for lapping of cylinders and for all other rough and fine grinding of metals and other materials. It is very useful in work shops, factories, garages etc.

Packing : 50g tin (25g Rough + 25g Fine)
400g Rough & Fine tins

RTV - SILICONE SEALANTS



Best quality RTV Silicone Sealants are available in Acetoxy and Neutral cure, equivalent to the best brands in the world. Bulldog GP 20-20 is an acetoxy based sealant that is used in large quantities in construction, automotive and all places where long lasting sealing is required. Bulldog Bond 888 is a high quality neutral cure RTV Silicone Sealant that is used in electronics, electrical, automotive, mechanical and many other industries, where special sealing is required.

3mm Bead @ 25°C and 50% RH
GP 20-20

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Adhesion to Glass
0.90 -0.95 g/ml	4-5 min	20-22 Hrs	7-9	300-350%	Good

Packing: 20-20 (Acetoxy) : 280ml Cartridges, Clear / Black / White

Bulldog Bond 888

Density	Skin Dry Time	Full Dry Time	Shore A Hardness	Elongation	Oil Resistance
0.94 -1.00 g/ml	5-7 min	22-24 Hrs	15-17	250-300%	Resistant

Packing: 100g Tube

RUBBER ADHESIVE



A most versatile rubber based adhesive Bulldogbond is used for a variety of sticking and joining applications for varied materials such as rubber, plastics, laminates, foam, cardboard, thermocole etc. It is very useful in the automotive sector and in industries and also in households, schools and shops. Available in tubes with nozzles.

Appearance	Viscosity (B8)	Density	Skin Dry Time	Full Dry Time	Adhesivity
Light Yellow	26 - 28 sec	0.84 - 0.86 g/ml	5 -10 Min	10-15 Min	Excellent Bonding

Packing : 10ml / 20ml / 50ml Tubes



“BULLDOG”

TITE - EPOXY ADHESIVE



FAST & CLEAR □ STANDARD

Bulldog "Tite" - Fast & Clear is an Epoxy Adhesive that forms very strong adhesive joints in a very short period of time viz. 5 min. The cured adhesive is clear and can be used for sticking materials that can be seen from the outside.

Bulldog Tite - Standard forms very strong bonds and is very useful for all joining and sticking work of permanent nature.

Both are useful in automotive hardware, as tile adhesives and many more applications. The bonding is very strong and long lasting.

Fast & Clear
Packing : 6g /13g / 36g Tubes

Standard
Packing : 13g / 36g / 90g/ 180g Tubes
270g / 450g / 900g / 1800g Jars

B-SEAL - EPOXY PUTTY



FAST SET □ REGULAR

Bulldog" B-Seal Epoxy Putty - Fast Set is a fast setting epoxy putty which forms durable seals on metals, wood, plastic and many other materials. It sets into a hard seal in 30 minutes. It seals tanks, pipes, roof leaks, rebuilds shafts, and can be used to fill gaps.

B- Seal Regular is a slower setting Epoxy Putty, which gives high strength bonds, seals most materials and it is widely used in industries and constructions. Known for its superior strength.

Both are very useful in automotive, maintenance in workshop, and factories and domestic sector also.

Packing : 25g / 100g

THREAD LOCKER



These are anaerobic adhesives that are ideal for keeping nuts & bolts and bearings in place. Once applied and tightened the bolts or bearing remain sealed in place by the adhesive, and are not opened or dislodged, even due to continuous vibrations that are experienced by automobiles. Can be easily removed when required by tools for maintenance work. Bulldog Threadlocker is a best quality material.



Packing : 4ml / 10ml Plastic Bottles

BD - 100 - MAINTENANCE SPRAY



An ideal spray for dislodging rusted fasteners, removing stuck machinery parts, lubrication, electrical works etc. It is an essential spray for all garages and workshop for opening and lubricating parts. Very effective maintenance spray for all purposes.

Packing : 65ml / 125ml / 400ml Aerosol Cans

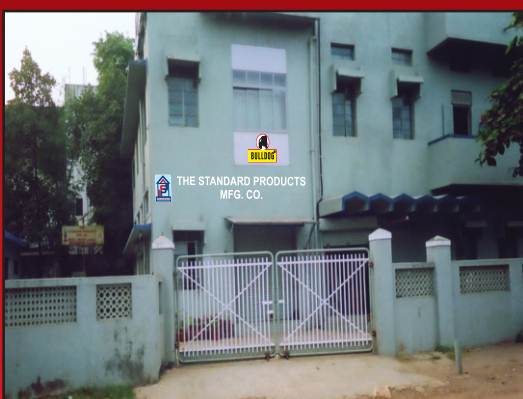

THE STANDARD PRODUCTS MFG. CO.
2/14, Marol Co-op Indl. Estate, M. Vasanji Road,
Marol, Andheri (E), Mumbai 400 059.
Tel : 022-2850 0970 / 2850 6703
E-mail : spmc59@gmail.com